

XR-B XR-B4 Flexible LED Display Panel For Stunning Visual Experience

Our Product Introduction

for more products please visit us on googolled.com


Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: Googol
- Certification: CE, FAD, ROHS
- Model Number: XR-B





Product Specification

- Highlight: XR-B4 flexible led display panel,
SMD 1515 flexible led display panel,
XR-B soft led display

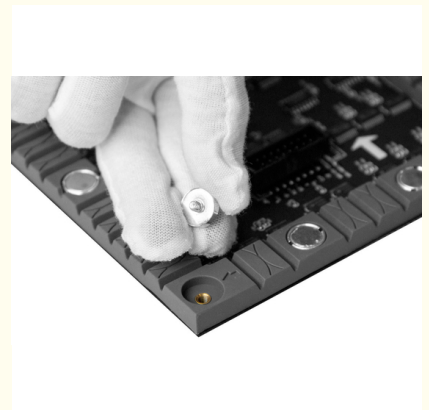

More Images



Product Description

Flexible LED Display Innovative And Versatile LED Screen For Stunning Visual Experience XR-B

1. Product introduction

In order to ensure you a better and faster understanding of our products, please read this specification carefully

The invention of flexible LED display screen ingenuity comes from the traditional soft light bar. On this basis we have improved the technology of the display screen, combined with the traditional plane hard module, and injected the concept of flexible beauty, large and wide angle display, which broke the technical system of the traditional display screen and showed the soft and colorful side of the modern display. At the same time, the development of new technology, but also gives its convenient installation and efficient construction efficiency

Flexible LED module can be assembled into different curved surface display screen according to the installation requirements, covering the typical cylindrical screen, spherical screen and many other "soft" for the United States, giving the viewer a more wonderful, more colorful visual experience. We have been committed to the development and innovation of LED display screen, so for this specification introduced in the products and parameters, will be adjusted and updated from time to time, we do not have separate notice, please continue to pay attention to us. If this article can help your use, we are very pleased.

If you need more accurate services or have better suggestions, please contact us with your contact information, we will do our best to provide you with professional support.

Finally, thank you again for choosing our products!

2. Key parameters

Prat Number		XR-B2	XR-B4
Technical Parameters	LED Configuration	1R1G1B(Full Color)	
	LED	SMD 1515	SMD 2020
	Pixel Density (dot/㎡)	250000	62500
	Module Size (mm)(LxWxH)	256*128*8.6	
	Module Resolution	128*64	64*32
	Drive Mode/S	32	16
	IC	PMW	Double Suffers
	Refresh Rate (Hz)	3840	1920
	Repetition Frequency(Hz)	60	

	Gray Scale(bit)	12-13	12
	Assembled Diameter(mm)	652	326
	Camber	≥158°	≥135°
	Signal Interface Mode	HUB75(MIDI)	
	Shell Material	Silicone Soft Shell	
	Module Weight(g/pcs)	225	195
	Flatness(mm)	≤0.5	
	IP Rate	Unguard	
	Installation/Maintenance	Front/Back	
Optical Parameter	Lunminance(cd)	750-800	800-850
	Color Temperature(K)	10000-12000 Adjustable	
	XY	X:0.2500 Y:0.3000 ±0.01	
	H/V V/V	X:150° Y:120°	X:140° Y:120°
	Contrast Ratio	≥5000:1	
	Module Supply Voltage DC(V)	5	

Electric Parameter	Max. Module Current DC(A)	2.8
	Module Max. Power Consumption(w/pcs)	14
	Input Voltage AC(V)	220
	Max. Power Consumption(w/m2)	490
	Average Power Consumption(w/m2)	140
Operation Parameter	Lifespan	100,000h
	Operating Temperature	-20~40°C
	Operating Humidity	20%~75%RH



Shenzhen Googol Display Technology Co., Ltd



+8615766165492



jimmy.wenmy@gmail.com



googolled.com

2nd Floor, Building A, Area 1, Ganghuaxing Industrial Park, No. 2 Chongqing Road, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen