

P4.81 SMD1921 LED Display Module 104x52 Resolution IP66 Waterproof

Our Product Introduction

for more products please visit us on googolled.com

Basic Information

- Price: \$879/pieces >=1 pieces




Product Specification

- Color Temperature: 2000-9300 Adjustable
- Warranty: 1 Year
- Operating Temperature: -20°C-70°C
- Resolution: 208*208
- Waterproof: Ip66
- Viewing Angle: 170°
- Contrast Ratio: 7000:1
- Power Consumption: ≤500W
- Refresh Rate: 3840HZ
- Mounting Options: Floor Stand, Custom Mount, Ceiling Mount, Wall Mount
- Power Supply: 100-240V DC
- Content Management System: Yes
- Sunlight Readable: Yes
- Remote Device: No



More Images



Product Description

Product Description



Specification




item	value
warranty	1 Year
type	LED
application	Outdoor
pixels	P4.81
Content Management System	Yes
Remote Device Management	No
place of origin	ShenZhen,China
Brightness	7000cd
Color Temperature	2000-9300 adjustable
Operating Temperature	-20℃-70℃
Resolution	208*208
Waterproof	ip66
Viewing Angle	160°
Contrast Ratio	7000:1
Power Consumption	≤500W
Refresh Rate	3840HZ
Frame rate (Hz)	≥60HZ
Drive mode	Constant current drive,1/13 scan
Gray level	Any within 65536 gray levels
Color processing bits	16 bit
Mounting options	Floor stand, Custom Mount, ceiling mount, wall mount
Power Supply	100-240V DC
Sunlight Readable	Yes
Usage environment	shopping malls, window display, outdoor permanent, stage background, outdoor fixed, outdoor permanent installation, outdoor fixed installation, advertising display, indoor/outdoor, trade show, advertisement, Outdoor use, electric scooter, billboard, island, City, Sea, Water, beach, PARK, Universal, Countryside, Exhibition, Advertising, Highway, Truck, Shop, Outdoor
brand name	Googol

use	advertising publish, retail store, display of dishes, welcome display, shopping mall, self-service business, subway, elevator, Restaurant & Hotel Supplies, Education, medical treatment, airport, wayfinding, exhibition hall
media available	Photo, EDA/CAD Models, datasheet, Other
color	Full-color
model number	P4.81
pixel density	43264 dots/square meter
Pixel Structure	SMD1921 3in1
Module resolution (W*H)	104*52=5408
Module size (mm)	500*250
Module weight (kg)	2.7kg
Module input voltage (V)	4.2V
Maximum current of the module (A)	≤18A
Maximum power consumption (W)	≤66W
Cabinet module composition (W*H)	4(W)*2(H)
Cabinet resolution (W*H)	208*208
Cabinet size (mm)	1000*1000*60mm
Cabinet material	Profile box
Typical lifespan (hrs)	100,000H
Operating temperature/humidity range (°C/RH)	-20°C-70°C/10%RH-98%RH(No condensation)
Storage temperature/humidity range (°C/RH)	-20°C-70°C/10%RH-98%RH(No condensation)

Power supply ratio scheme

Power	scheme
400Wpower supply	4pcs module with load


Accessory

category	Name	Picture
Assembly parts	Power supply , signal lines	
	Screw, connecting plate	
	Sleeves,front and rear maintenance tools	


Product feature.



- 1、 It has a strong adaptability to outdoor environmental climate
- 2、 The structure is hard connected and the entire process is wireless : The product structure adopts hard connection, is wireless throughout the process, and has a neat and beautiful appearance.
- 3、 The profile box is lightweight, safe and reliable, and not prone to deformation : The LED display screen adopts a profiled box, with each box weighing only 23.5KG. It is flame-retardant and fireproof, and is not prone to deformation under high-temperature conditions.

Installation hole location diagram

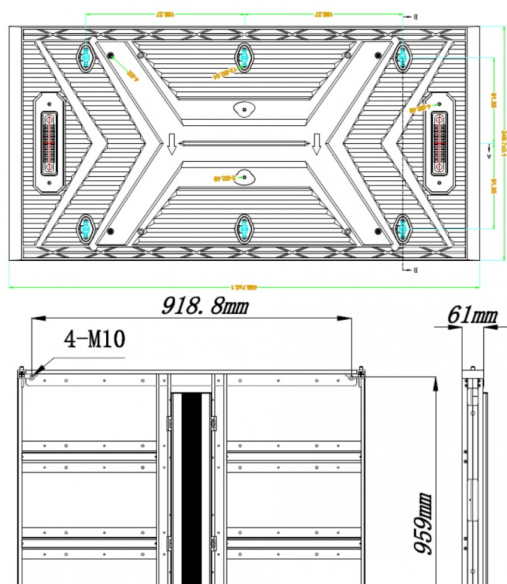

Installation sample diagram

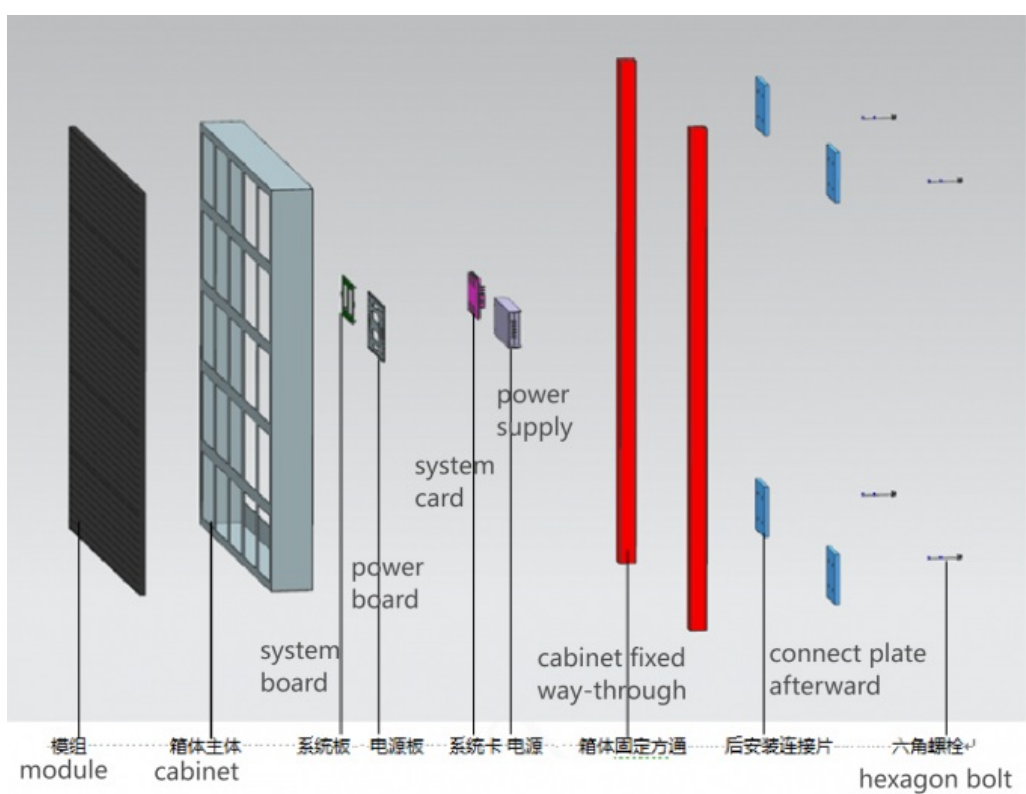

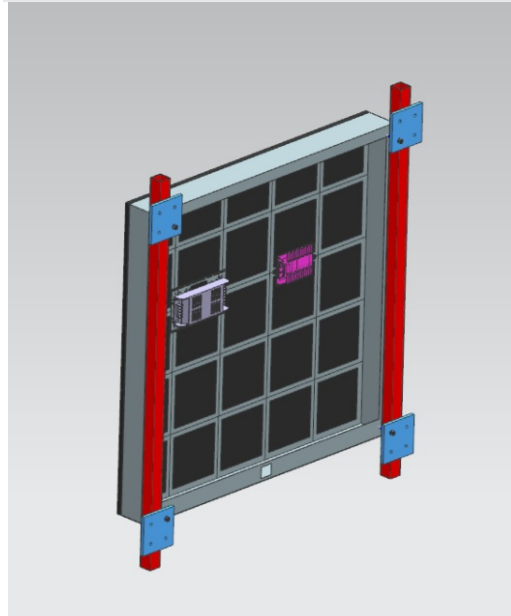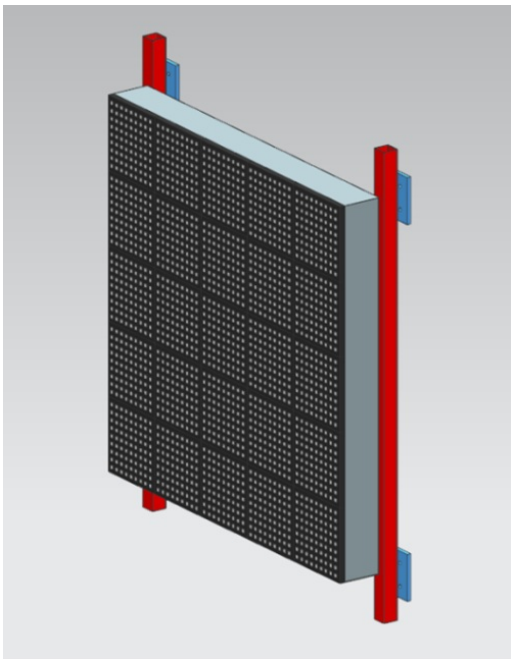

Shenzhen Googol Display Technology Co., Ltd



+8615766165492



jimmy.wenmy@gmail.com



googolled.com

2nd Floor, Building A, Area 1, Ganghuaxing Industrial Park, No. 2 Chongqing Road, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen